

HTX1600 Laser Rangefinder Quick Start Guide



Specifications & Features

Magnification Objective Lens Diameter

Close Focus
Eye Relief
Exit Pupil
Field of View

Water-Resistance Rating

Lens Coating Housing Material Dimensions

Total Wt. (including battery)

Laser Type Display Type

Range Response Time

Battery Type Battery Life

Laser Range (Reflective) Laser Range (Tree) Laser Range (Deer)

Horizontal (Angle Corrected) Mode

Angle with Line of Sight Mode

Archery Mode Gun Mode Golf Mode SCAN Mode 6X

21 mm 6 yards

16 mm 3.5 mm

31.50 ft. at 100 yds.

IPX4 (Water-Resistant)

Multi Coated

Composite with Rubber Armoring

4"x 1.44"x 3.11"

4.25 oz.

905 nm Class 1 Eye-Safe High Transmission LCD

0.1 seconds

CR-2 3-volt Lithium

Approximately 10,000 Readings

6-1,760 yds. 6-1,000 yds. 6-800 yds.

Yes Yes

Yes Yes Yes

Yes



What's in the Box?


- ◆ 6 Power x 21mm Laser Rangefinder Monocular
- ◆ Soft Premium Carry Case
- ◆ Microfiber Lens Cleaning Cloth
- ◆ Adjustable Neck-style Lanyard
- ◆ Astra Optix™ Decal Sticker
- ◆ CR-2 3-volt Lithium Battery (Battery Pre-Installed)
- ◆ Quick Start Guide



Your Rangefinder at a Glance



High Transmission LCD

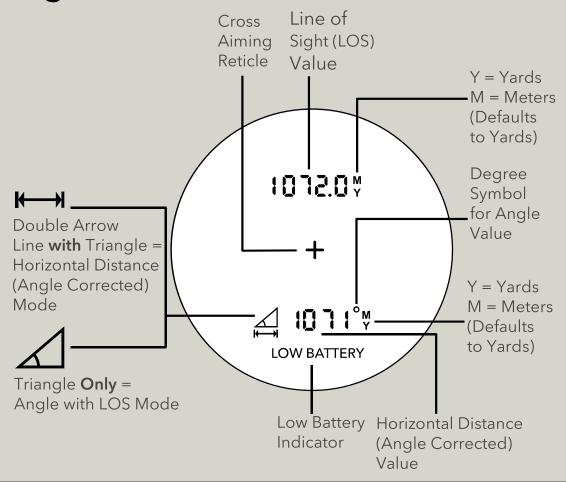



Quick Start

1. Connect the Battery: Open the **Battery Cover** and remove the plastic insert from the top of the battery.



2. Turn on unit and Adjust Eyepiece
Diopter Focus: Press the Power (Range)
Button to turn on the rangefinder High
Transmission LCD display.

Turn the **Eyepiece Diopter Focus** until both the image in the field of view and **Aiming Reticle** are clear and focused.

Press the Power Button


Rotate Eyepiece






3. Measuring Distance: Aim the Aiming Reticle on the object you want to range and press the Power Button to display the distance. Your unit factory default setting is the Horizontal (Angle Corrected) Mode.

The Line of Sight (LOS) value is displayed at the top of the display for 2 seconds.



The angle-corrected Horizontal Distance (4) value is displayed at the bottom of the display for up to 8 seconds or until you take a new measurement.

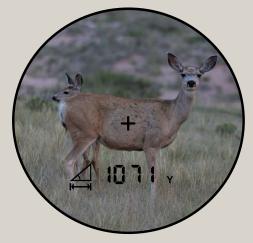



Quick Start

4. Menu Settings - Button Operation Summary



4.1. Menu Settings - Menu Operation Summary

- Distance Units SelectionY / M
- ◆ Standard Mode (Std)
 - Horizontal (Angle Corrected) with Line of Sight
 - Angle with Line of Sight
 - OFF (Only Line of Sight)
- ◆ Archery Mode (ArCH)
- ◆ Gun Mode
- ◆ Golf Mode


4.2. Yards & Meters Selection: In the menu press the **Power (Range) Button** to cycle between Yards (Y) and Meters (M). Press the **Mode Button** to select.






Quick Start

4.3. Select the Operation Mode:
Press the Power Button to cycle
between Standard Mode (Std), Archery
Mode (ArCH), Golf Mode or Gun Mode.
When the selection you want to use is
blinking, press the Mode Button to
select your preferred mode.

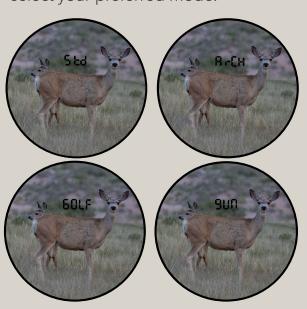

4.4. Sub-Modes under Standard Mode:Press the **Power Button** to cycle between each sub-mode. Press the **Mode Button** to select.

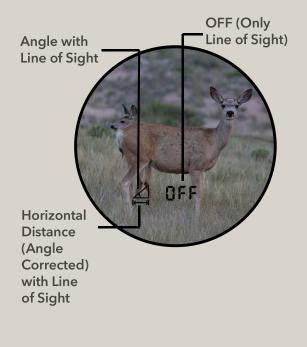



Tips for Using Your Rangefinder

- ◆ Your laser rangefinder comes defaulted to the **Horizontal (Angle Corrected) with Line of Sight** distance mode. For archery or shooting, this mode will give you the angle-corrected shoot-at distance to use. For Archery only, use the Archery Mode (ArCH).
- If you turn off your rangefinder, it will keep the last settings used.
- → This rangefinder also has **Angle with Line of Sight** mode. In this mode, it will display the **Line of Sight (LOS)** value for 2 seconds at the top of the display followed by the **Angle** value at the bottom of the screen. Shooters can use this information to calculate holdover using a ballistics calculator.
- ◆ The **Gun Mode** is optimized so that the value displayed will be the farthest distance value of a group of targets that are within your field of view. This is good if you are trying to range a target through trees or other obstructions.
- ◆ If using this rangefinder on the golf course, choose the **Golf Mode (GOLF)**. The **Golf Mode** will display the nearest distance value (Golf Flagstick) of a group of targets that are within your field of view.
- ◆ Under ideal conditions, your Astra Optix[™] Laser Rangefinder can measure the distance of reflective objects out to 1,760 yds. It can also measure a deer out to 800 yds. The type of target you are ranging strongly impacts the maximum ranging distance.
- ◆ Shiny reflective objects such as metal buildings will range much better than less-reflective objects such as trees, animal fur, bushes or grass.
- Objects that are more dense, such as trees or rock, will range better than bushes or grass.
- Bright-colored objects normally range better than dark-colored objects.
- Rain, fog, snow, bright sunny days and dusty days will reduce the overall ranging performance.
- ◆ Cloudy days without fog, snow, rain or dust blowing in the air provide the best ranging conditions.
- ◆ Targets that have a flat surface 90° to the laser emitting from the laser rangefinder range better than targets that have a curved surface, or are positioned at an angle in relation to the emitted laser.



Register your Product

Please register your product to activate our **Handshake Warranty** online at www.astraoptix.com so it is covered in case anything happens to your product.





Like us on Facebook to see the latest news for our Astra Optix rangefinders!



Follow us on Instragram to see our product photos

Scan our warranty QR code to go directly to our Handshake Warranty registration page.

Review your Product

Help fellow outdoor enthusiasts with their purchasing decisions by writing an authentic review about your experience with us at www.amazon.com/ryp.





Warning

- Do not look directly at the sun with your rangefinder, as it could cause serious. damage to your eyes.
- Do not aim the rangefinder at a person's eyes and do not look into the objective-lens side of the product when you are pressing the power button.
- Keep out of reach of small children.
- Only use a CR2 3-volt battery and do not use any outside power source.
- Do not attempt to open or take apart your laser rangefinder, as this will void your lifetime warranty, may damage your product and could cause electric shock.
- Class 1 Laser Product. Product complies with IEC60825-1: Ed. 3: 2014-05 and 21CFR1040, 10/11.

We are here to help!

Don't hesitate to reach out to us if you have any questions or concerns about your product. On behalf of the Astra Optix family, we want to thank you for your purchase and support.



