



Saiga Scorpion Recoil Pistol Grip

Installation Instructions

PART# A.5.10.2348, A.5.20.2348, A.5.40.2348

(Fits: Saiga Firearms)

Thank you for purchasing an ATI product!

Advanced Technology
INTERNATIONAL



Pistol Grip Installation

Point the firearm in a safe direction and place the safety in the "on" position. Next remove the magazine, pull back the bolt, and carefully inspect the chamber to be sure the firearm is unloaded.

Note: Trigger assembly must be modified to the forward position for installation of ATI's Strikeforce Packages. ATI does not supply the components necessary to modify the trigger assembly.

Step #1

Begin by removing the receiver cover and recoil spring.

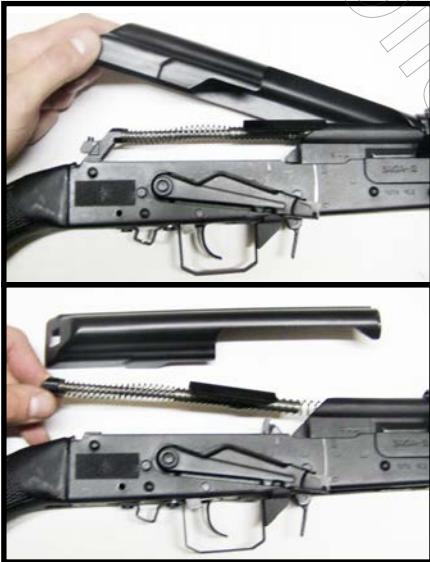


Figure 1

Step #1

Remove the existing pistol grip from the Saiga.



Figure 2

Step #3

While holding the pistol grip nut, slide the new ATI Saiga Pistol Grip over the pistol grip nut. Insert the pistol grip bolt, and use an allen driver to tighten the pistol grip bolt to the firearm.



Figure 3

Step #4

Insert the Scorpion Pistol Grip Pad onto the new pistol grip. Slide the pad all of the way up and into place. Insert the (2) plastite screws in the bottom of the grip, and tighten each using a philips head screwdriver.



Figure 4

Advanced Technology International • Made In the USA • Limited Lifetime Warranty

2733 West Carmen Ave • Milwaukee, WI 53209

Toll Free: 800.925.2522 • Fax: 414.464.3112

www.ATIGunstocks.com