



CORE RXQ30V

Thermal Sight





Reticle Catalogue

Notice



The values of the reticles indicated in this catalogue are correct when the magnification of the scope is set to minimum

X54i

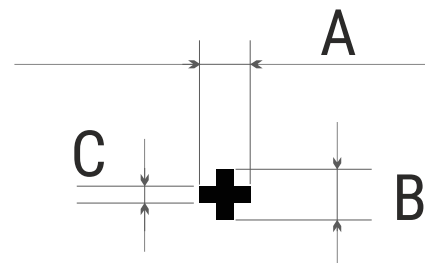



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	38.4 / 111.8

H50i

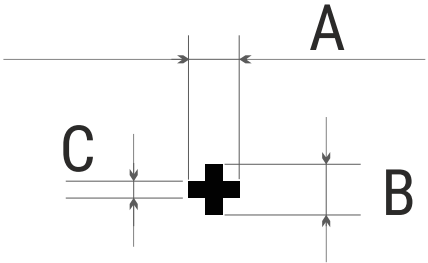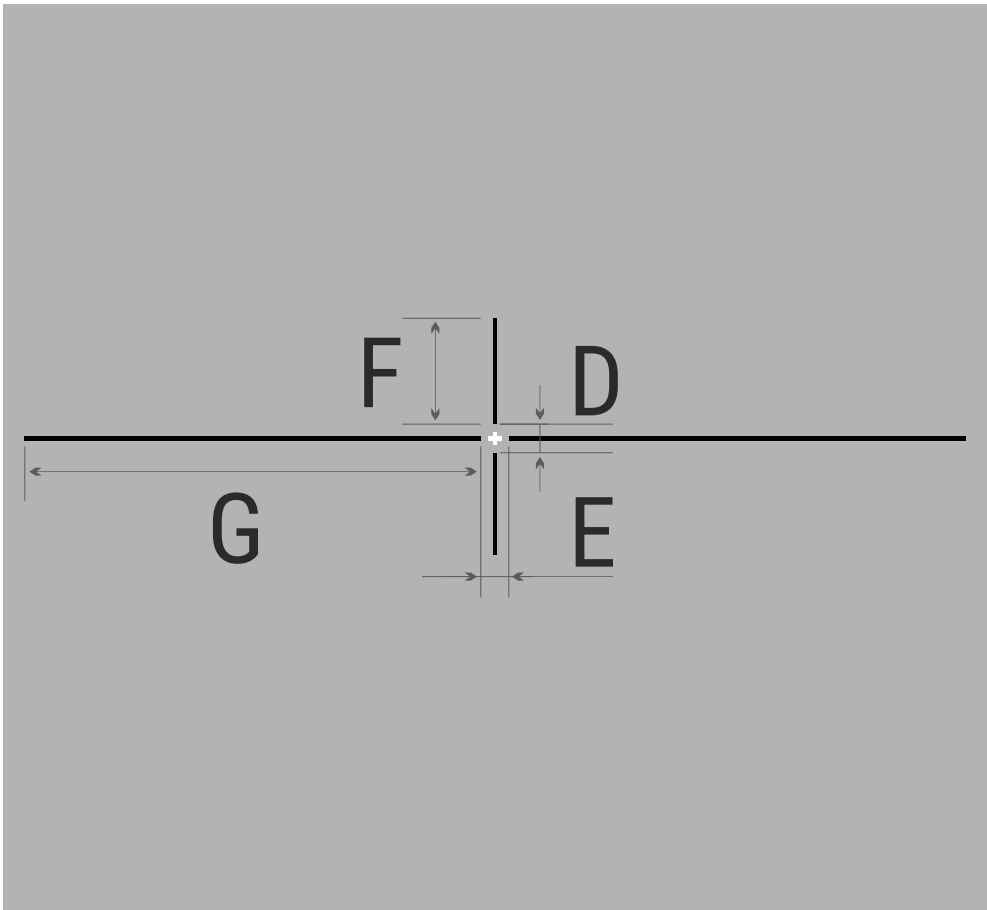



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	10.8 / 31.3
Section E	10.8 / 31.3
Section F	40 / 116.3
Section G	172.2 / 501.1

M54i

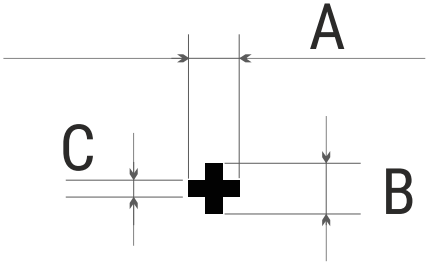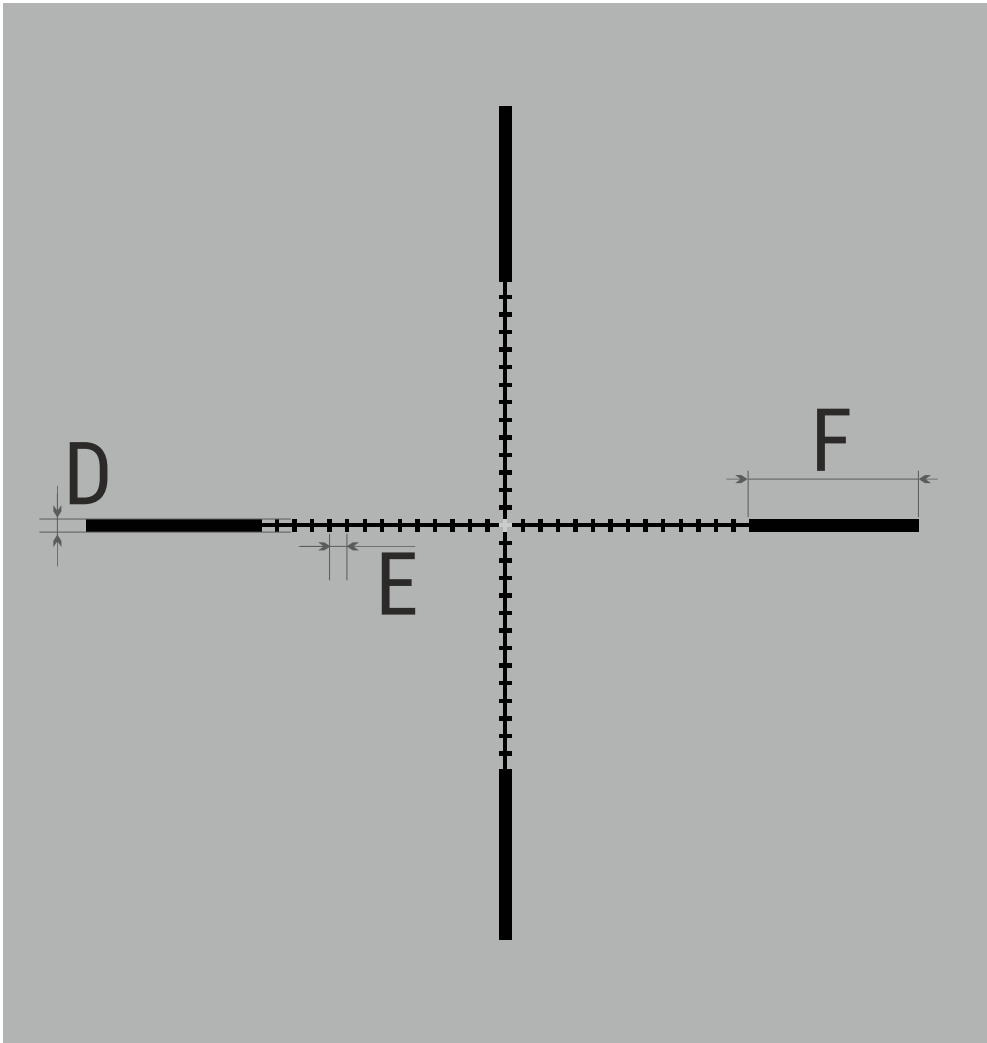



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	4.6 / 13.4
Section E	4.6 / 13.4
Section F	60 / 174.5

M50i

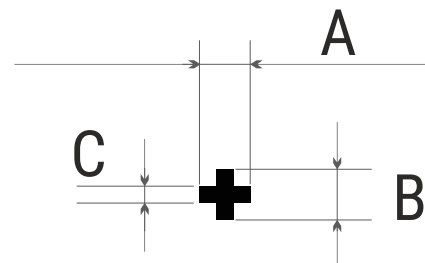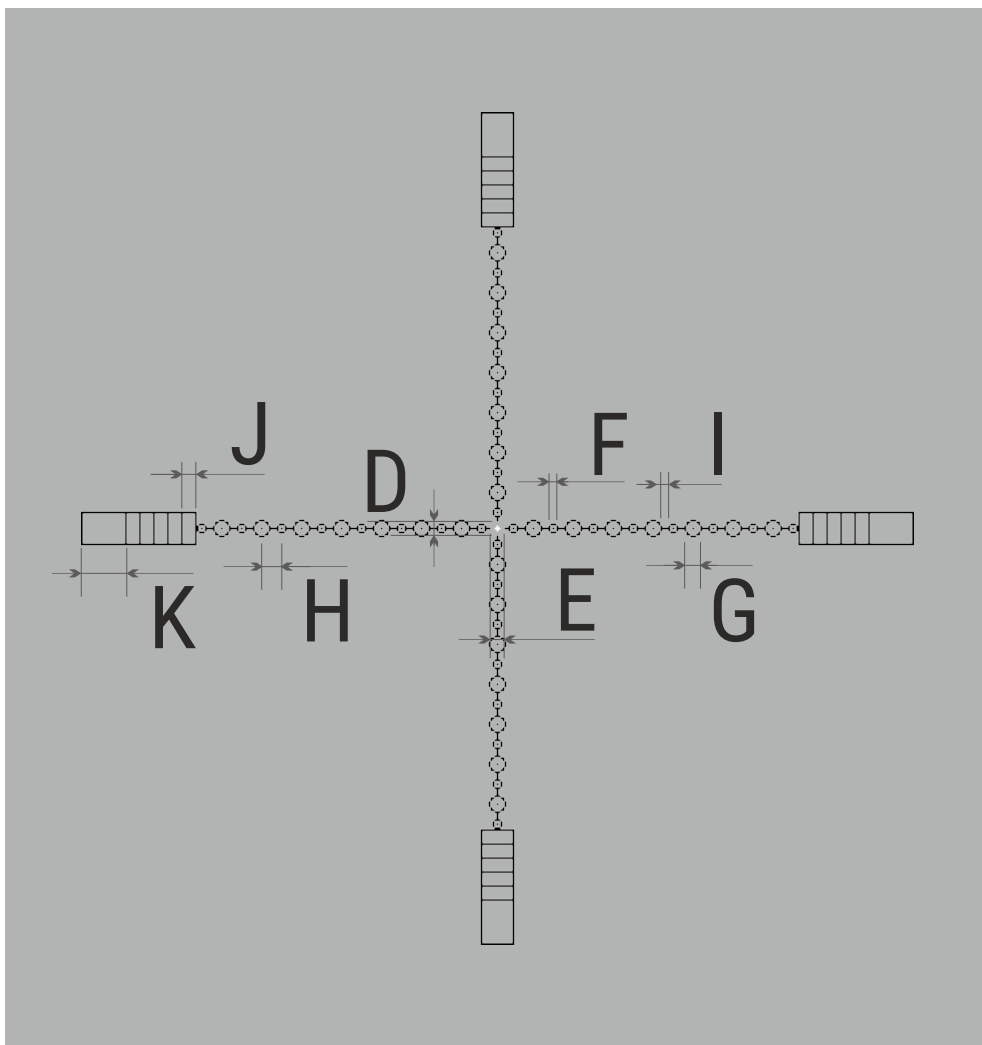



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	10.8 / 31.3
Section E	10.8 / 31.3
Section F	7.7 / 22.4
Section G	13.8 / 40.3
Section H	15.4 / 44.7
Section I	4.6 / 13.4
Section J	9.2 / 28.6
Section K	32.3 / 93.4

X50i

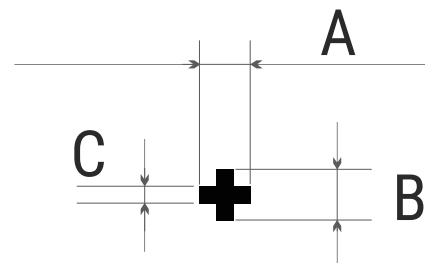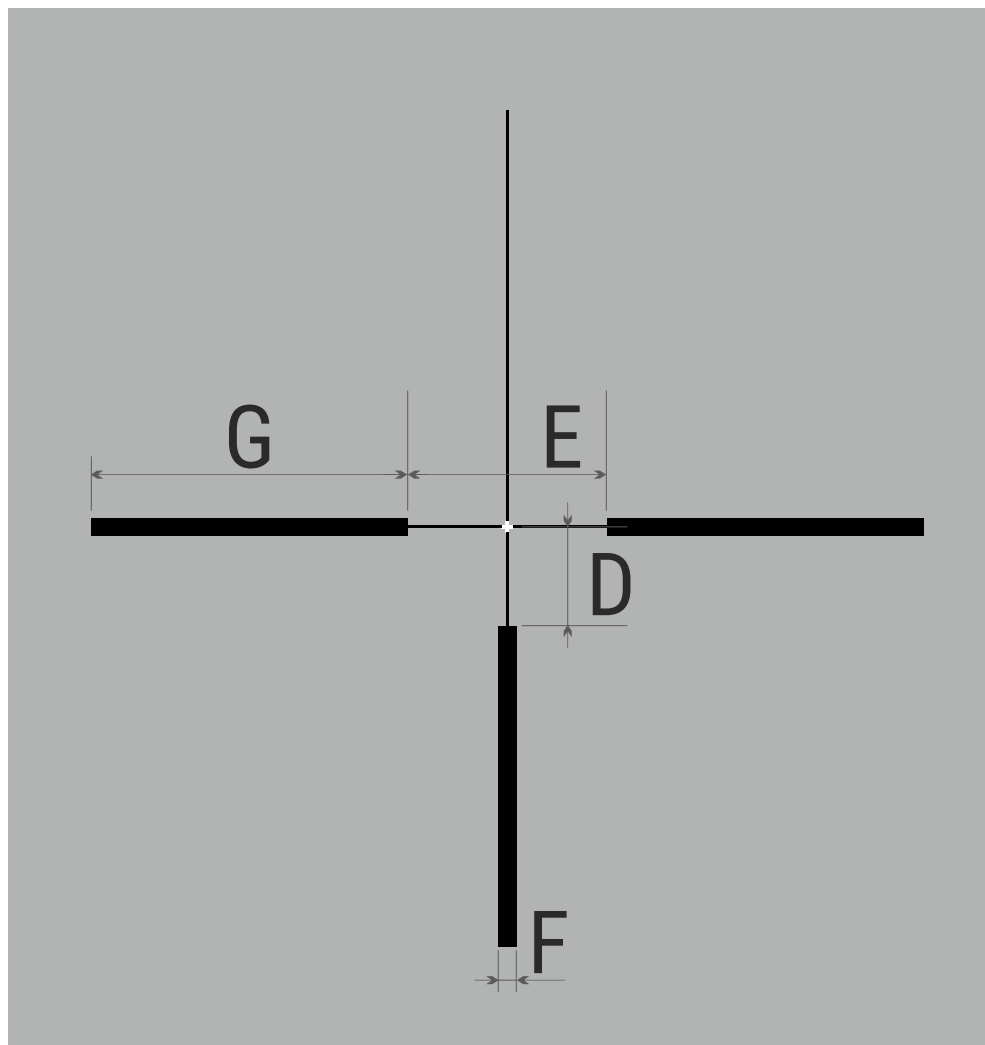



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	41.5 / 120.8
Section E	84.6 / 246.1
Section F	7.7 / 22.4
Section G	135.3 / 393.7

X53i

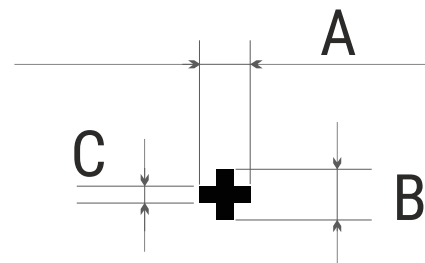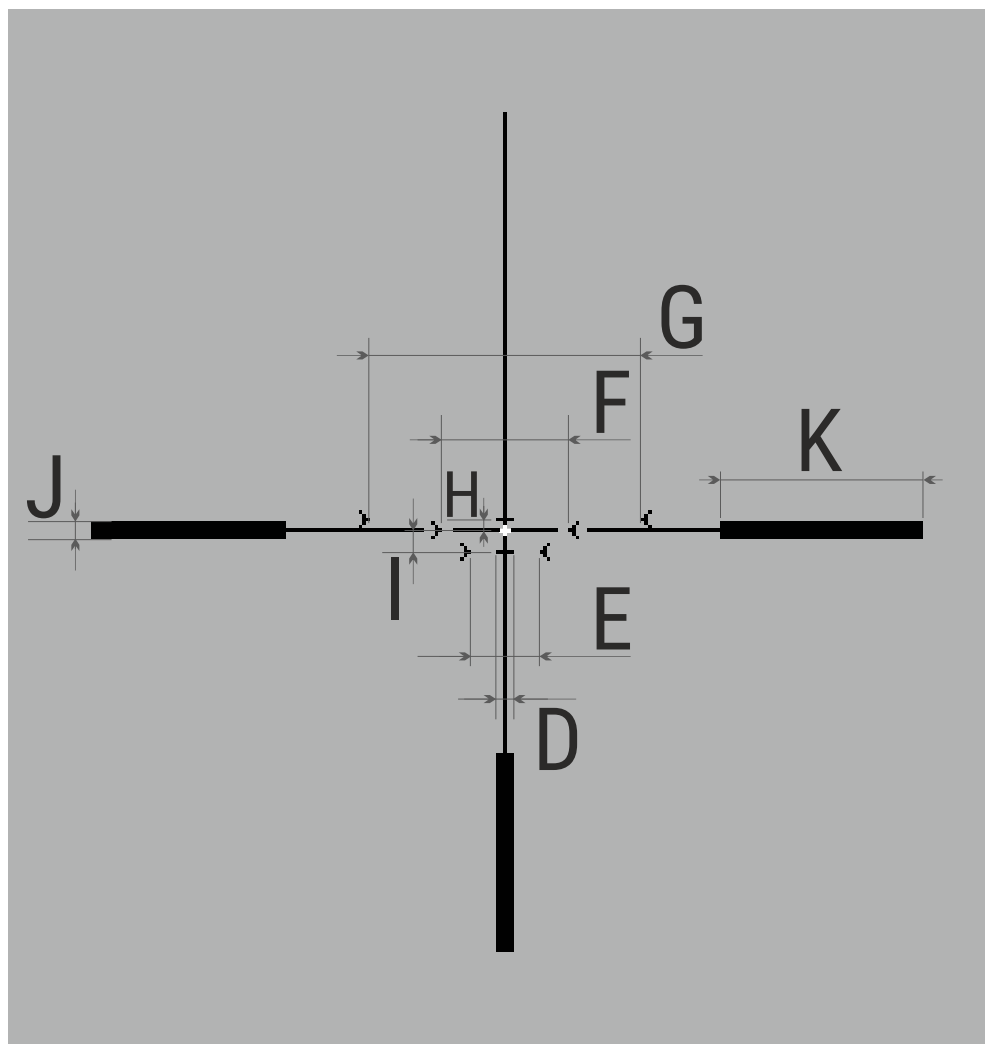



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	7.7 / 22.4
Section E	16.9 / 49.2
Section F	35.4 / 102.9
Section G	46.1 / 134.2
Section H	4.6 / 13.4
Section I	9.2 / 26.8
Section J	7.7 / 22.4
Section K	83 / 241.6

T50i

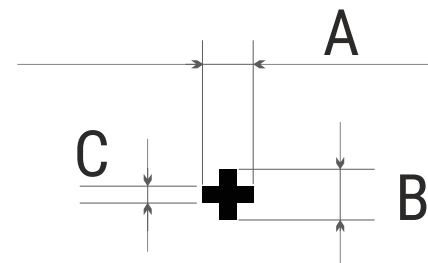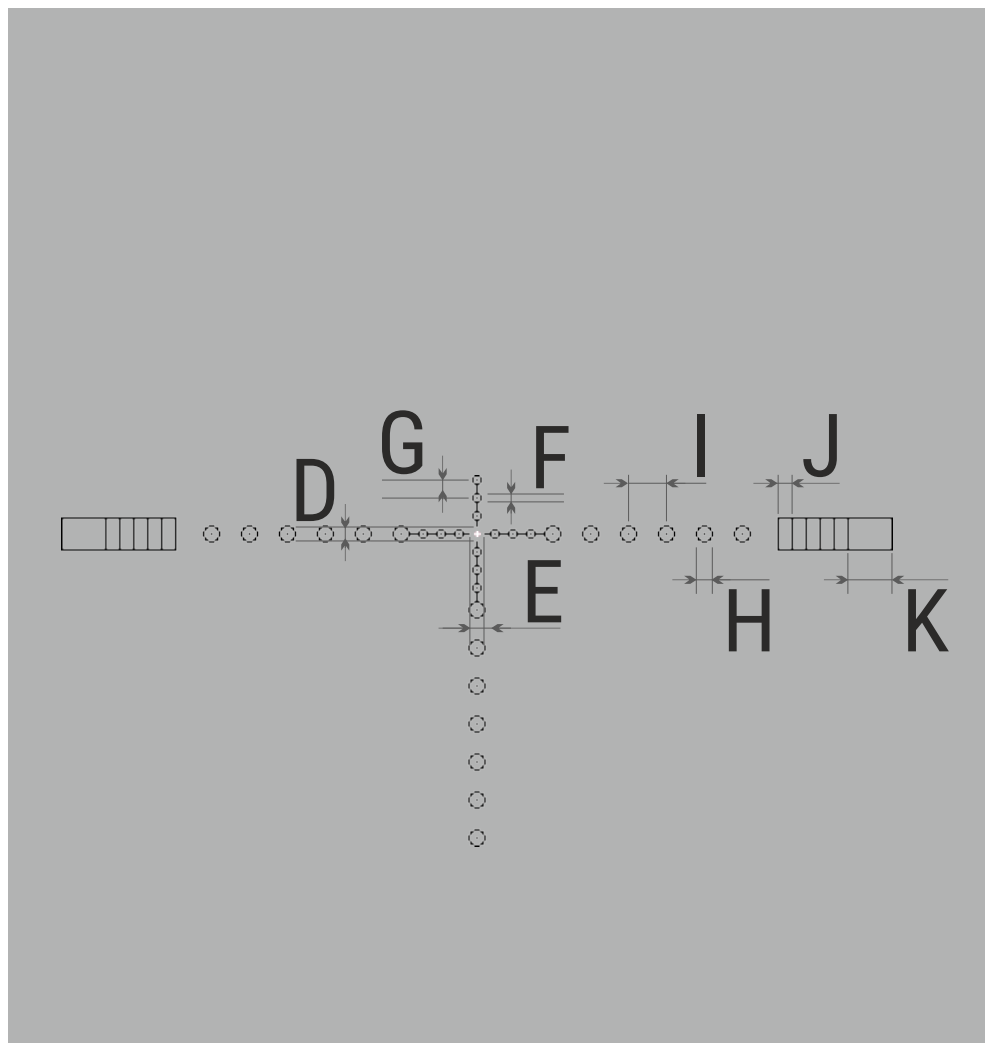



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	10.8 / 31.3
Section E	10.8 / 31.3
Section F	7.7 / 22.4
Section G	13.8 / 40.3
Section H	13.8 / 40.3
Section I	29.2 / 85
Section J	9.2 / 26.8
Section K	32.3 / 93.9

T51AI

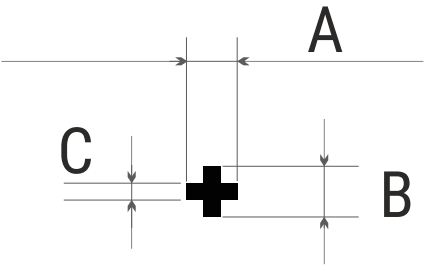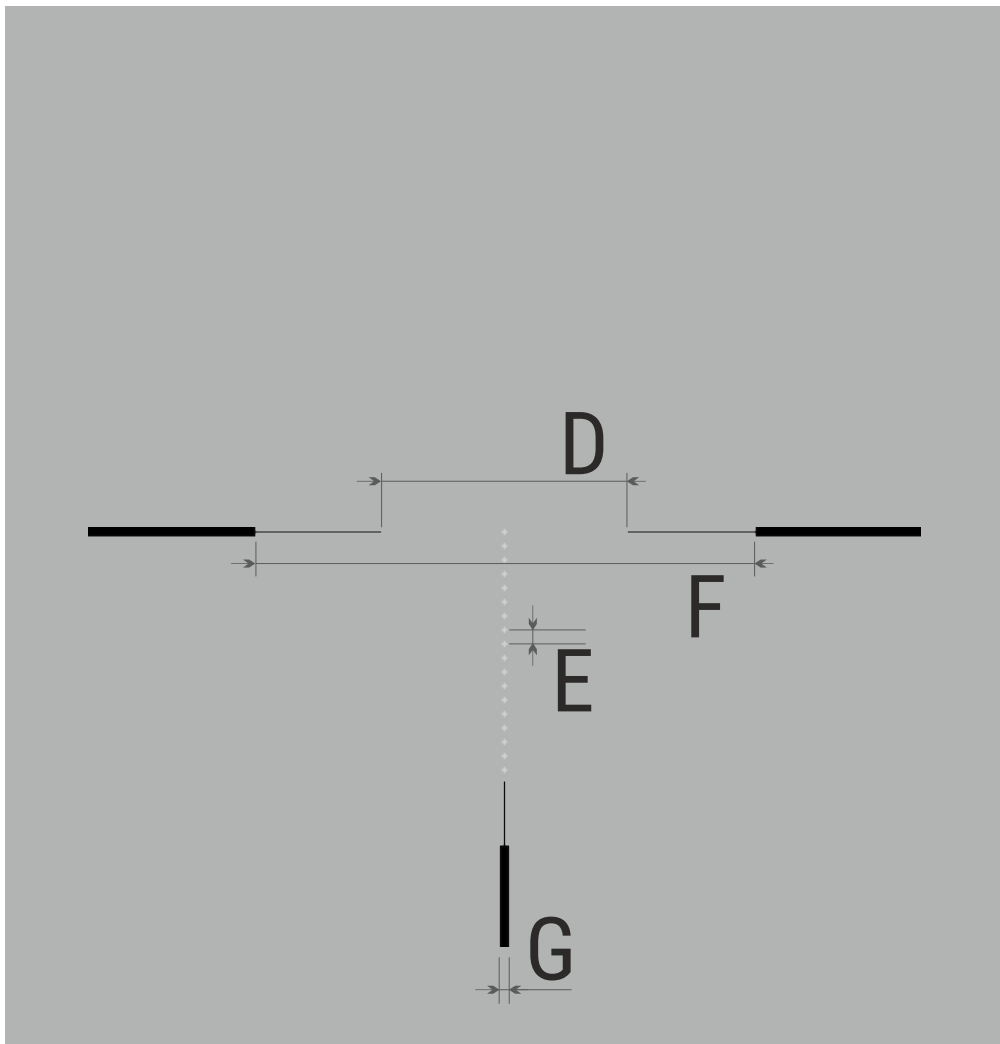



Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	189.1 / 550.3
Section E	10.8 / 31.3
Section F	382.8 / 1113.9
Section G	7.7 / 22.4

T52i

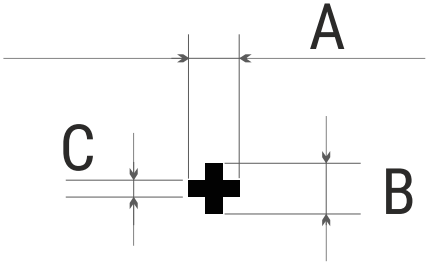

Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	29.2 / 85
Section E	15.4 / 44.7

X51i-300

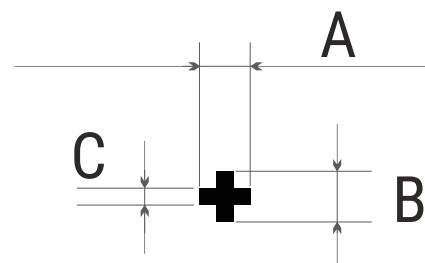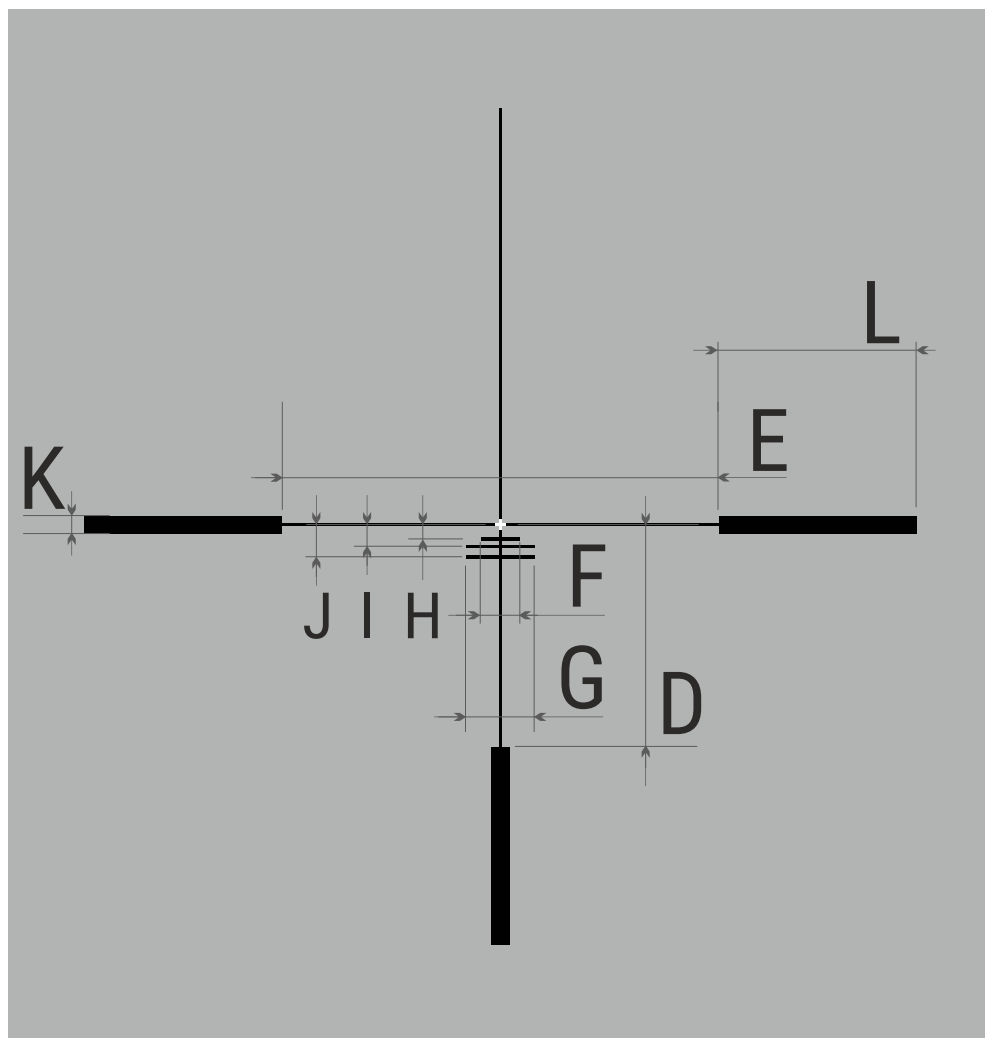

Reticle parameters	MOA / cm @ 100 m
Section A	4.6 / 13.4
Section B	4.6 / 13.4
Section C	1.5 / 4.4
Section D	95.3 / 277.4
Section E	186 / 541.3
Section F	16.9 / 49.2
Section G	29.2 / 85
Section H	6.1 / 17.9
Section I	9.2 / 26.8
Section J	13.8 / 40.3
Section K	7.7 / 22.4
Section L	84.6 / 246.1