



CRIMSON TRACE



USER GUIDE



BDC .223/5.56 RETICLE

BDC .223/5.56 RETICLE

The BDC (Bullet Drop Compensation) .223/5.56 Reticle is designed to compensate for the trajectory of a specific ammunition.

Please note that the reticle is based upon ballistic information and may or may not produce these exact results based on a variety of variables such as:

- Actual Velocity (Ammunition manufacturers' information may not match the exact velocity out of your firearm. The best way to confirm velocity is to use a chronograph).
- Temperature
- Humidity
- Altitude
- Barometric Pressure
- Condition of firearm
- Scope mounting system

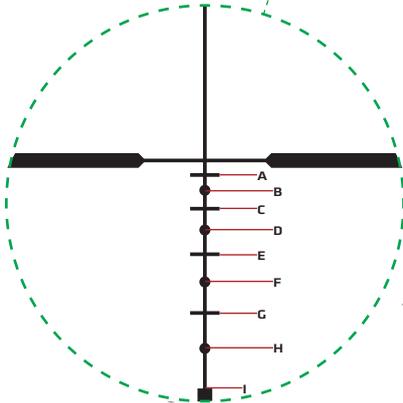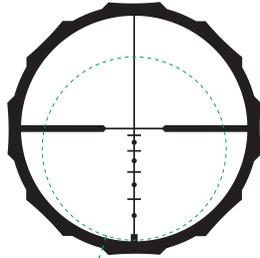

TRACE™

BALLISTIC CALCULATOR

Get precise bullet drops for your reticle and ammunition. Use our FREE Crimson Trace® Ballistic Calculator. *Available for all Crimson Trace® Reticles

Crimson Trace® Ballistic Calculator
Go to www.crimsontrace.com
for more information.

Subtensions for yardages were calculated using the following variables.
Note: all subtensions are calculated at MAX magnification.

- Caliber .223
- Muzzle Velocity (fps) 3165
- Bullet Wt (gn) 55
- Ballistic Coefficient G1 0.246
- Zero Range (yd) 100
- Temp (Fahrenheit) 59
- Altitude (feet) 2500
- Scope Height over bore (in) 2.50

SUBTENSION	YARDS	MOA
A	200	0.99"
B	250	2.03"
C	300	3.28"
D	350	4.73"
E	400	6.38"
F	450	8.26"
G	500	10.37"
H	550	12.78"
I	600	15.50"



CRIMSON TRACE[®]

CRIMSON TRACE HEADQUARTERS
9780 SW FREEMAN DRIVE, WILSONVILLE, OR 97070
TELEPHONE: 800-442-2406 • FAX: 503-783-5334
CRIMSONTRACE.COM