




CRIMSON TRACE®

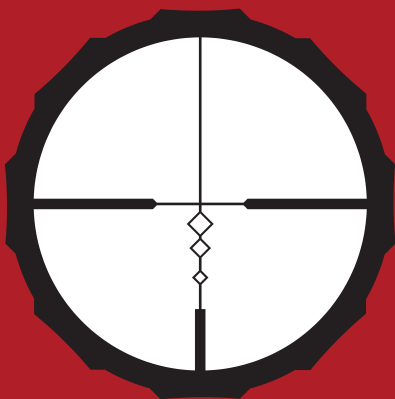

USER GUIDE


BDC MUZZLELOADER RETICLE

BDC MUZZLELOADER RETICLE

The BDC (Bullet Drop Compensation) MUZZLELOADER Reticle is designed to compensate for the trajectory of a specific load.

Please note that the reticle is based upon ballistic information and may or may not produce these exact results based on a variety of variables such as:

- Actual Velocity (powder manufacturers' information may not match the exact velocity out of your firearm. The best way to confirm velocity is to use a chronograph).
- Temperature
- Humidity
- Altitude
- Barometric Pressure
- Condition of firearm
- Scope mounting system

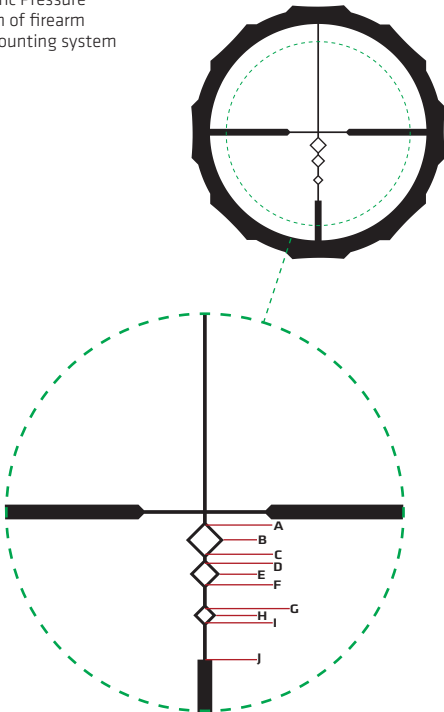

BDC MUZZLELOADER RETICLE

TRACE™ BALLISTIC CALCULATOR

Get precise bullet drops for your reticle and ammunition. Use our FREE Crimson Trace® Ballistic Calculator. *Available for all Crimson Trace® Reticles

Crimson Trace® Ballistic Calculator
Go to **www.crimsontrace.com**
for more information.

Subtensions for yardages were calculated using the following variables.
Note: all subtensions are calculated at MAX magnification.

- Caliber .50
- Muzzle Velocity (fps) 2200
- Bullet Wt (gn) 250
- Ballistic Coefficient G1 0.240
- Zero Range (yd) 100
- Temp (Fahrenheit) 59
- Altitude (feet) 2500
- Scope Height over bore (in) 1.50

SUBTENSION	YARDS	MOA
A	125	0.90"
B	150	1.90"
C	175	2.90"
D	185	3.45"
E	200	4.20"
F	215	4.95"
G	240	6.50"
H	250	7.00"
I	260	7.50"
J	300	10.00"



CRIMSON TRACE[®]

CRIMSON TRACE HEADQUARTERS
9780 SW FREEMAN DRIVE, WILSONVILLE, OR 97070
TELEPHONE: 800-442-2406 • FAX: 503-783-5334
CRIMSONTRACE.COM