




***CRIMSON TRACE***<sup>®</sup>

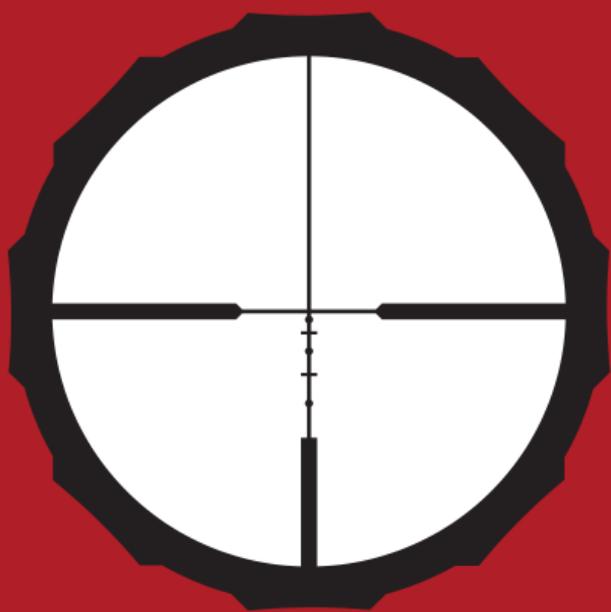

**USER GUIDE**


**BDC RIMFIRE RETICLE**

## BDC RIMFIRE RETICLE

The BDC (Bullet Drop Compensation) RIMFIRE Reticle is designed to compensate for the trajectory of a specific ammunition.

Please note that the reticle is based upon ballistic information and may or may not produce these exact results based on a variety of variables such as:

- Actual Velocity (Ammunition manufacturers' information may not match the exact velocity out of your firearm. The best way to confirm velocity is to use a chronograph).
- Temperature
- Humidity
- Altitude
- Barometric Pressure
- Condition of firearm
- Scope mounting system

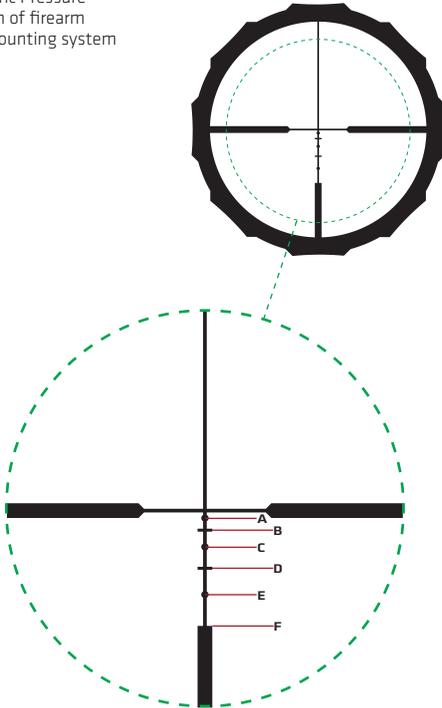

BDC RIMFIRE RETICLE

# TRACE™

Get precise bullet drops for your reticle and ammunition. Use our FREE Crimson Trace® Ballistic Calculator. \*Available for all Crimson Trace® Reticles

**Crimson Trace® Ballistic Calculator**  
Go to [www.crimsontrace.com](http://www.crimsontrace.com)  
for more information.

Subtensions for yardages were calculated using the following variables.  
Note: all subtensions are calculated at MAX magnification.

- Caliber .22LR
- Muzzle Velocity (fps) 1235
- Bullet Wt (gn) 36
- Ballistic Coefficient G1 0.126
- Zero Range (yd) 50
- Temp (Fahrenheit) 59
- Altitude (feet) 2500
- Scope Height over bore (in) 1.50

SUBTENSION	YARDS	MOA
A	60	0.51"
B	70	1.33"
C	80	2.47"
D	90	3.92"
E	100	5.71"
F	110	7.84"



***CRIMSON TRACE***<sup>®</sup>

CRIMSON TRACE HEADQUARTERS  
9780 SW FREEMAN DRIVE, WILSONVILLE, OR 97070  
TELEPHONE: 800-442-2406 • FAX: 503-783-5334  
[CRIMSONTRACE.COM](http://CRIMSONTRACE.COM)