



## INSTALLATION INSTRUCTIONS

OWNER'S MANUAL ADDENDUM FOR:

**LG-426**

Sig Sauer P226 pistols

**L A S E R G R I P S**


*Please read entire Owner's Manual prior to installing and using your new Lasergrips.*

## INSTALLATION INSTRUCTIONS


1. Make sure firearm is unloaded. Remove magazine and double check that chamber is empty.
2. Remove Stock Grips and set screws and star washers to the side.
3. Place one battery straight down into battery well on each side, with the flat, (+) side visible.
4. Align the left panel with the firearm, insert stock screws and tighten the panel to the frame. **Note:** Star washers may or may not need to be installed. If the screws protrude into the magazine well, remove the screws and insert the star washers.
5. Align the right panel with the firearm, insert stock screws and tighten the panel to the frame. Again, the star washers may need to be installed.
6. Lasergrips are default set at the factory to be in the "ON" position. Test the master on/off button (located on the left side of Lasergrip) by pressing firmly on the master button. To turn off, firmly press master on/off button.
6. Confirm that laser and iron sights are in alignment. Laser dot should rest on top of front site post with correct iron sight picture. Lasergrips are sighted-in at the factory to 50', but can be fine-tuned for windage and elevation. (See Lasergrips Owner's Manual for complete sighting info.)

## BATTERIES:

Two (2) CR2032 or DL2032 lithium cells.



MASTER ON/OFF SWITCH

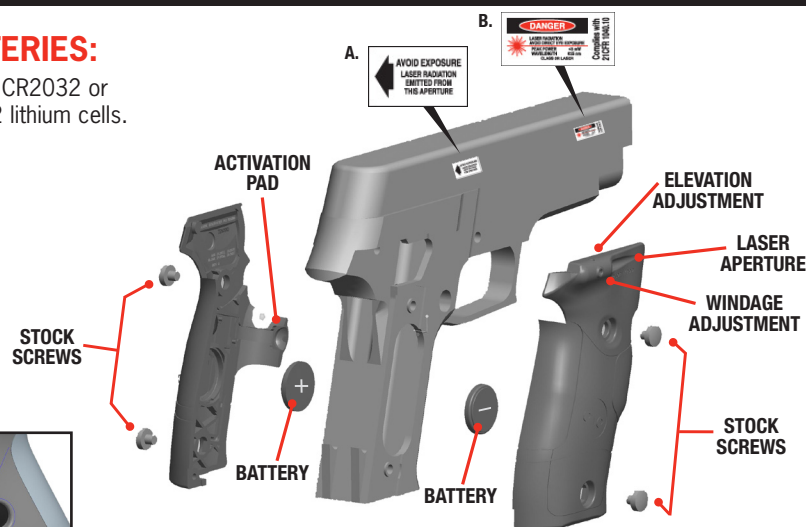

## LASER SAFETY LABELING

**IMPORTANT: LASER PRODUCTS MUST ONLY BE OPERATED WITH THE SAFETY LABEL APPLIED TO THE FIREARM.**

Labels could not be affixed to the product but are supplied and must be installed as indicated below:

A. Attach the "Danger" warning label to the out-side of the firearm.

B. Attach the "Aperture" warning label with the arrow pointing to the laser aperture.

Use caution when activating the laser to avoid direct eye exposure, which can result in permanent eye damage. Follow all precautions as outlined by the firearms manufacturer. Keep this and all firearm related products locked and secured from children or other unauthorized users.

**MADE  
IN USA**

27-4186 LG426 Rev 02

Phone: (800) 442-2406 or (503) 783-5333 / Fax: (503) 783-5334  
Customer Service E-mail: [customer@crimsontrace.com](mailto:customer@crimsontrace.com)  
**[www.crimsontrace.com](http://www.crimsontrace.com)**  
9780 SW Freeman Drive, Wilsonville, OR 97070

Rev 01 7/20/09

**Thank you for selecting the finest laser sighting system: Crimson Trace Lasergrips.**

When it comes to speed, accuracy and security, Crimson Trace is the top choice of law enforcement, militaries and legally armed citizens around the world.

## OPERATING INSTRUCTIONS

The LG-426 is activated by a strategically located pressure pad. With a normal shooting grip, your middle finger will naturally hit the pressure pad whether shooting right or left-handed.

Master ON/OFF switch is located on the left-side of Lasergrip and is activated and deactivated by pressing master on/off button firmly. **Turning the master switch "OFF" will NOT increase battery life.**