

Trijicon ACOG®



There's a reason the Trijicon ACOG® (Advanced Combat Optical Gunsight) is the official medium-distance engagement optic of the U.S. Marine Corps and U.S. Special Operations Forces. And why more than one million have been produced. Each one is specifically engineered to provide increased hit potential in all lighting conditions, while also providing legendary durability and reliability.

- 1 Ruggedized forged housing delivers combat proven durability and reliability
- 2 Bindon Aiming Concept (BAC) features both eyes open shooting for improved situational awareness
- Battery free tritium/fiber optic illumination provides brilliant aiming point in any lighting, LED versions also available
- BDC reticles available in most magnifications along with target-ranging reference points
- 5 Fixed magnifications available from 1.5x to 6x

The Science of Brilliant

At Trijicon, we are bound by a commitment to industry-leading research, design, and testing to seek innovative aiming solutions that constantly redefine "brilliant." That's why every Trijicon riflescope design is tested to the procedures below.















> Alaska-to-Africa Temperature Tested

To ensure each family of riflescopes is ready for whatever our users put them through, we perform an "Alaska-to-Africa" temperature shock test with temps from -20°F to 140°F.

Solid Zero Tested

Our riflescopes are designed to hold their zero giving you the precision you need. Every model is subjected to 5,000 consecutive rounds, confirming no reticle shift has occurred.

Drop Tested

Because we don't believe every drop should be followed by a warranty claim, we drop test each riflescope design to check for durability.

Shock & Vibration Tested

All riflescope models are tested to withstand recoil and vibrational stresses without malfunction, so it can take a beating before, during, and after use.

> Immersion Tested

All models are immersion tested, and every riflescope is dry-nitrogen filled to eliminate internal fogging.

Features and Benefits



A Always On, Always Ready

Most ACOG® models are battery-free, featuring a tritium/ fiber optic-illuminated reticle that atuomatically adjusts the brightness based on available light.

B Outstanding Clarity

The quality of the glass and multi-coated lenses maximizes light-gathering capabilities and clear field of view with zero distortion.

C Rugged Aluminum-Alloy Housing

Fixed-power design allows for minimal moving parts to create a nearly indestructible sighting system.

Exact Target Distances & Holds

Most ACOG models feature a bullet dropcompensating and target-ranging reticle for decisive aiming.

Combat Proven

No other magnified optic has been used more in combat than the ACOG.

Shock-Resistant

Proven to withstand recoil from a .22LR to a .50BMG and everything in between. Easily passes U.S. Military drop test requirements.










	1.5x16s (TA44 Series)	1.5x24 (TA45 Series)	2x20 (TA47 Series)	3x24 (TA50 Series)
Magnification	1.5x	1.5x	2x	3x
Objective Lens	16mm	24mm	20mm	24mm
Eye Relief	2.4 in. 61.0mm	3.6 in. 91.4mm	2.1 in. 53.3mm	1.4 in. 35.6mm
Exit Pupil	0.42 in. 10.7mm	0.63 in. 16.0mm	0.39 in. 10.0mm	0.31 in. 8.0mm
Field of View (in degrees)	7.4°	4.9°	5.6°	4.9°
Field of View	39.0 ft. @ 100 yds. 12.9m @ 100m	25.6 ft. @ 100 yds. 8.6m @ 100m	29.31 ft. @ 100 yds. 9.8m @ 100m	25.6 ft. @ 100 yds. 8.6m @100m
Adjustments (PER IN. @ 100 YDS.)	2 clicks	2 clicks	2 clicks	2 clicks
Dimensions (L x W x H) W/O MOUNT	4.0 x 1.6 x 2.1 in. 102 x 42 x 53mm	5.8 x 1.6 x 2.1 in. 147 x 42 x 53mm	5.3 x 1.6 x 2.1 in. 135 x 42 x 53mm	5.0 x 1.8 x 2.1 127 x 46 x 53mm
Weight W/O MOUNT	5.1 oz. 144.5g	6.3 oz. 179.1g	6.4 oz. 180.6g	6.1 oz. 173.0g
Illumination Source	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium	Fiber Optics & Tritium
Battery Life	N/A	N/A	N/A	N/A
Reticle Calibration	N/A	N/A	N/A	.223 / 7.62x39

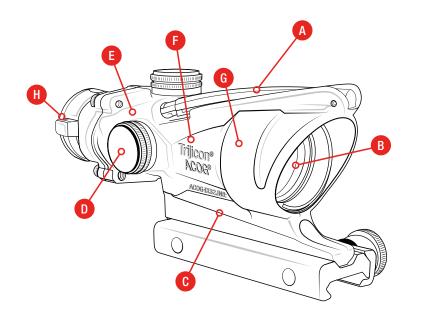

Waterproof

Exceptional waterproof performance. Dry nitrogenfilled to eliminate fogging and tested to perform in both extreme cold and heat.

"Both Eyes Open" Design
Can be used as a CQB sight when shooting "both eyes open" using the Bindon Aiming Concept.









3x30 (TA33 Series)	3.5x35 (TA11 Series)	3.5x35 LED (TA110 Series)	4x32 (TA01 Series)	
3x	3.5x	3.5x	4x	
30mm	35mm	35mm	32mm	
1.9 in. 48.3mm	2.4 in. 61.0mm	2.4 in. 61.0mm	1.5 in. 38.1mm	
0.33 in. 8.4mm	0.39 in. 9.9mm	0.39 in. 10.0mm	0.32 in 8.1mm	
3.7°	5.5°	5.5°	7.0°	
19.3 ft. @ 100 yds. 6.5m @ 100m	28.8 ft. @ 100 yds. 9.6m @ 100m	28.8 ft. @ 100 yds. 9.6m @ 100m	36.6 ft. @ 100 yds. 12.2 @ 100m	
4 clicks	3 clicks	2 clicks	2 clicks	
6.1 x 1.6 x 2.1 in. 155 x 42 x 53mm	8.0 x 2.1 x 2.6 in. 203 x 53 x 66mm	8.0 x 2.1 x 2.6 in. 203 x 76 x 66mm	5.8 x 2.0 x 2.3 in. 147 x 51 x 58mm	
7.8 oz. 221.1g	14.0 oz. 396.9g	16.8 oz. 476.3g	10.9 oz. 309.0g	
Fiber Optics & Tritium	Fiber Optics & Tritium	LED Powered by a AA Battery	Tritium Only	
N/A	N/A	12,000+ hours*	N/A	
.223 / .308 / 7.62x39 / 300 BLK	.223 / .308 / M193 / 300 BLK	.223 / .308	.223 / .308	





Specifications /













4x32 BAC	4x32 LED	5.5x50 (TA55 Series)	6x48
(TA31 Series)	(TA02 Series)		(TA648 Series)
4x	4x	5.5x	6x
32mm	32mm	50mm	48mm
1.5 in.	1.5 in.	2.2 in.	2.7 in.
38.1mm	38.1mm	55.9mm	68.6mm
0.32 in	0.32 in	0.36 in.	0.32 in.
8.1mm	8.1mm	9.1mm	8.1mm
7.0°	7.0°	3.5°	3.3°
36.6 ft. @ 100 yds.	36.6 ft. @ 100 yds.	18.3 ft. @ 100 yds.	17.3 ft. @ 100 yds.
12.2 @ 100m	12.2 @ 100m	6.1m @ 100m	5.8m @ 100m
2 clicks	2 clicks	5 clicks	4 clicks
5.9 x 2.0 x 2.5 in.	6.0 x 2.9 x 3.0 in.	12.0 x 2.5 x 2.7 in.	9.0 x 2.9 x 3.4 in.
150 x 51 x 64mm	153 x 74 x 76mm	305 x 64 x 69mm	229 x 74 x 86mm
10.5 oz.	18.1 oz.	25.6 oz.	36.9 oz.
297.5g	513.1g	725.8g	1046.1g
Fiber Optics	LED Powered	Fiber Optics	Fiber Optics
& Tritium	by a AA Battery	& Tritium	& Tritium
N/A	12,000+ hours*	N/A	N/A
.223 / .308 / M193 / 300 BLK / 6.8 SPC	.223 / 300 BLK	.223 / .308	.223 / .308 / .50 BMG

Available Reticles



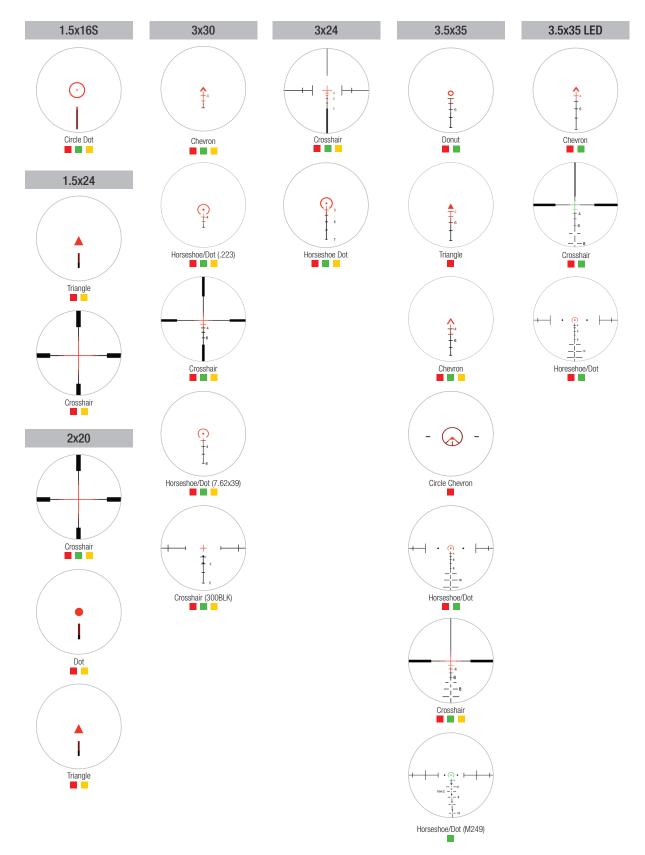

Available Reticles

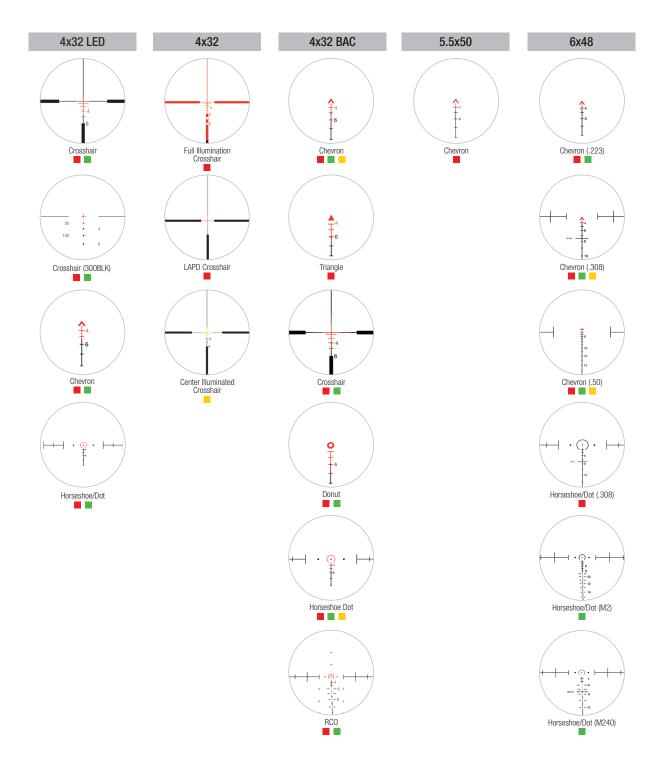

Reticles not shown to scale. For a full view of reticles, please visit our website at Trijicon.com.



