


# Available Reticles




Standard  
Duplex

HR940-C-2700005 / 3-9x40

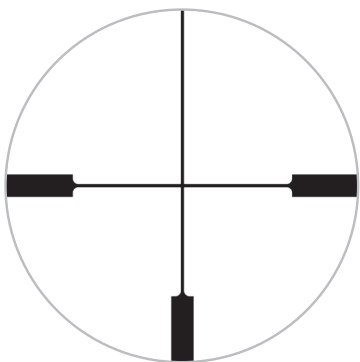

German #4


HR940-C-2700004 / 3-9x40

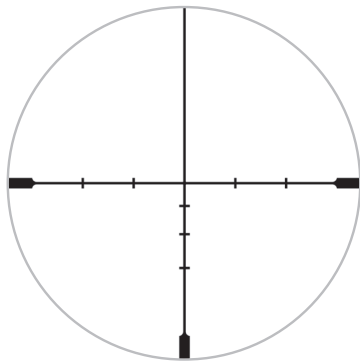

BDC  
Hunter Holds

HR424-C-2700001 / 1-4x24  
HR1040-C-2700002 / 2.5-10x40  
HR940-C-2700006 / 3-9x40  
HR1240-C-2700003 / 3-12x40

Reticles not shown to scale. For a full view of reticles, please visit our website at [Trijicon.com](http://Trijicon.com).

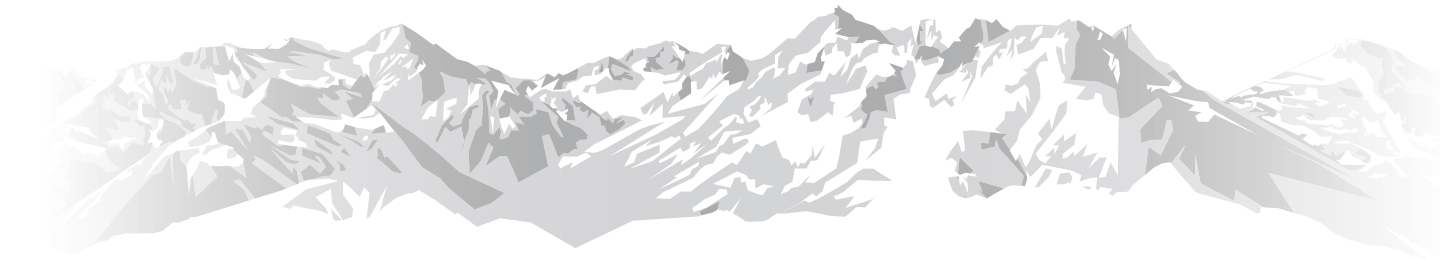

[Trijicon.com/Huron](http://Trijicon.com/Huron)

©2020 Trijicon, Inc. | Wixom, Michigan USA | Phone: 1-800-338-0563 | [info@trijicon.com](mailto:info@trijicon.com)  
Specifications subject to change without notice. | PML4075 Rev(0) 1119



# Trijicon Huron™



This is the Trijicon® variable rifle scope made specifically for the North American deer hunter. The Trijicon Huron™ comes with the high-quality glass, proven precision, and rugged construction you need for bragging rights every season, along with a price that lets you invest heavily in your other hunting gear.

- 1 Extreme durability and maintains zero in all conditions
- 2 Outstanding lens quality for any-light hunting
- 3 Intuitive hunting reticles for fast target acquisition
- 4 Anti-scratch glass coatings
- 5 Low-capped, easy-to-use adjusters that don't snag and keep their zero

## The Science of Brilliant®

At Trijicon, we are bound by a commitment to industry-leading research, design, and testing to seek innovative aiming solutions that constantly redefine “brilliant.” That’s why every Trijicon rifle scope design is tested to the procedures below.



- > **Alaska-to-Africa Temperature Tested**  
To ensure each family of riflescopes is ready for whatever our users put them through, we perform “Alaska-to-Africa” temperature shock tests with temps from -20°F to 140°F.
- > **Solid Zero Tested**  
Our riflescopes are designed to hold their zero giving you the precision you need. Every model is subjected to 5,000 consecutive rounds, confirming no reticle shift has occurred.
- > **Drop Tested**  
Because we don’t believe every drop should be followed by a warranty claim, we drop test each rifle scope design to check for durability.
- > **Shock & Vibration Tested**  
All rifle scope models are tested to withstand recoil and vibrational stresses without malfunction, so it can take a beating before, during, and after use.
- > **Immersion Tested**  
All models are immersion tested, and every rifle scope is dry-nitrogen filled to eliminate internal fogging.

To learn more about Trijicon and The Science of Brilliant, visit [Trijicon.com/Science](http://Trijicon.com/Science)

# Features and Benefits

- A

**Easy-Focus Eyepiece**  
Diopter accommodates the shooter's individual prescription.
- B

**Accurate Shot Placement at Various Distances**  
Versatile magnification ranges designed for the whitetail hunter.
- C

**Sleek Design & Finish**  
Satin finish and hunter knurling prevents snagging and allows for smooth adjustments of optic controls.
- D


**Quick & Easy Adjustments**  
Crisp, precise, windage / elevation adjusters require no tools. Capped adjusters ensure no accidental shift.
- E

**Field-Ready Construction**  
Ultra-lightweight ruggedized design stands up to the elements without added weight.
- F

**Edge-to-Edge Clarity**  
Fully multi-coated broadband anti-reflective glass provides excellent light transmission, true detail and color with zero distortion.
- G

**Fast Scanning, Detection, and Tracking**  
Extra-wide field of view for maximum situational awareness.
- H

**Rapid Target Acquisition**  
Uncluttered, easy-to-use reticles for fast and accurate shots.

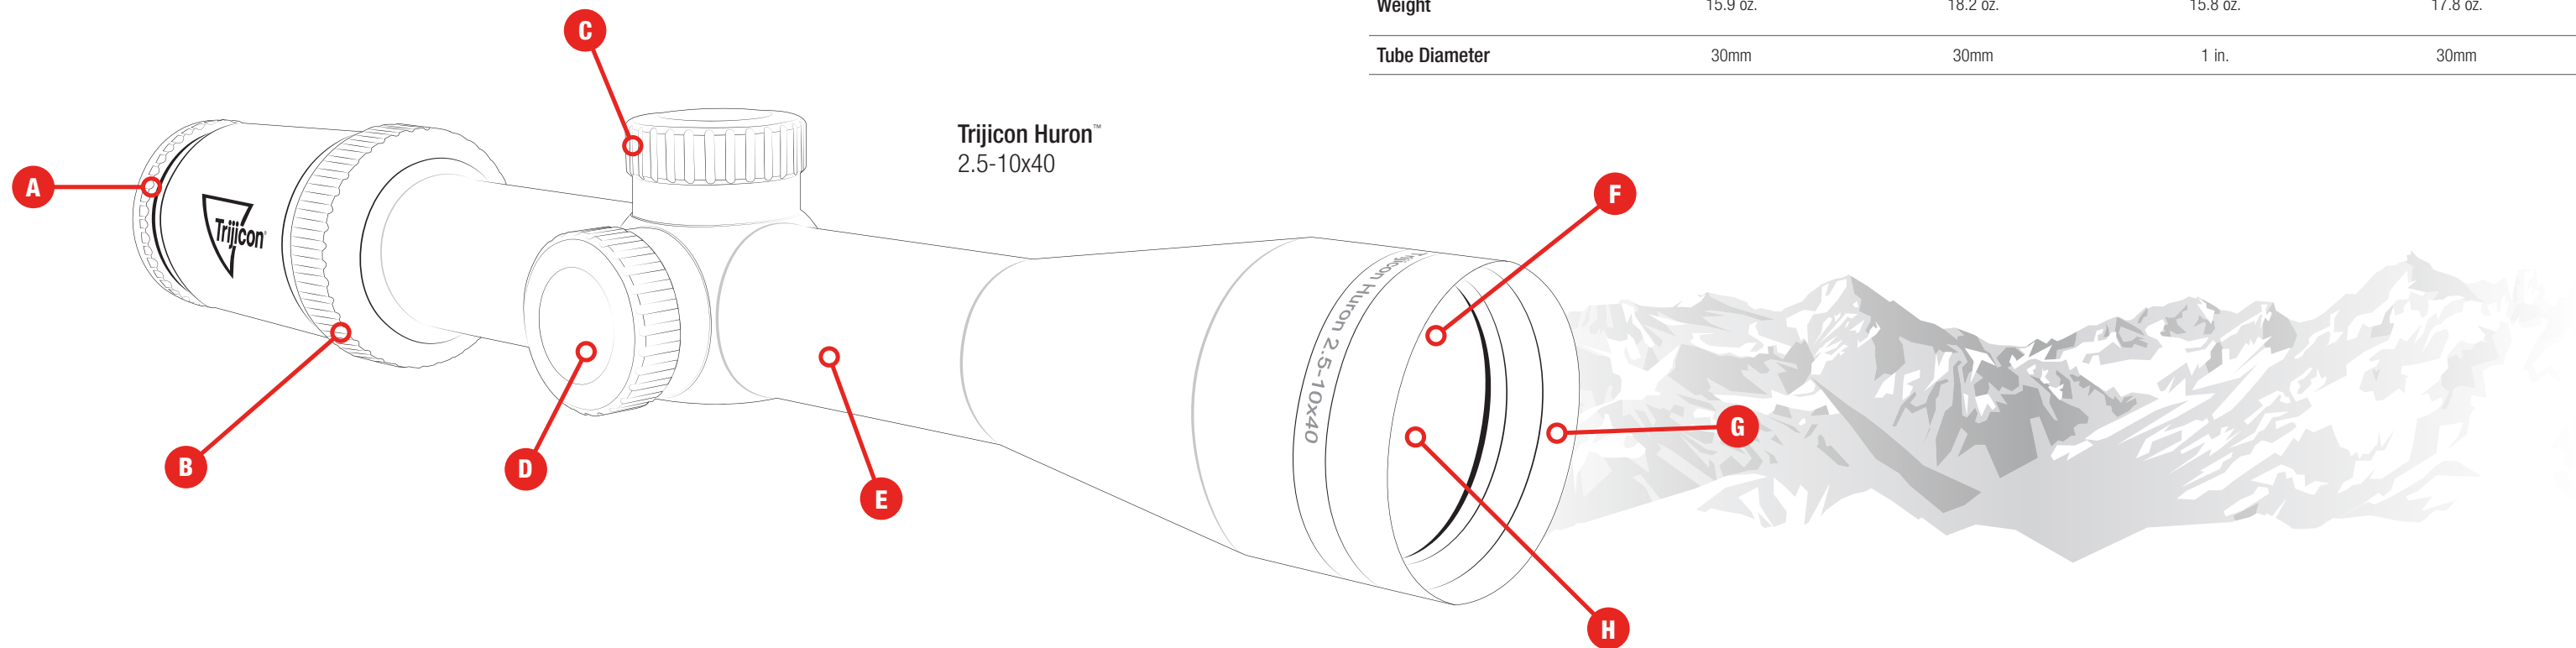

# Specifications



	1-4x24 (HR424 Series)	2.5-10x40 (HR1040 Series)	3-9x40 (HR940 Series)	3-12x40 (HR1240 Series)
Eye Relief	2.6 – 3.9 in. 65 – 98mm	2.4 – 3.3 in. 62 – 83mm	2.5 – 3.7 in. 63 – 93mm	2.2 – 3.2 in. 55 – 81mm
Exit Pupil	0.69 – 0.2 in. 17.5 – 5.1mm	0.58 – 0.16 in. 14.8 – 4.0mm	0.52 – 0.13 in. 13.3 – 4.5mm	0.52 – 0.13 in. 13.2 – 3.4mm
Field of View (@ 100 yd.) (@ 100m) (Degrees)	95.0 – 24.2 ft. 31.7 – 8.1m 18° – 4.6°	40.2 – 10.0 ft. 13.4 – 3.3m 7.66° – 1.92°	33.8 – 11.3 ft. 11.3 – 3.8m 6.45° – 2.15°	36.3 – 9.1 ft. 12.1 – 3.0m 6.93° – 1.74°
Focal Plane	Second	Second	Second	Second
Elevation Adjuster Style	Low Capped	Low Capped	Low Capped	Low Capped
Adjustments	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click	1/4 MOA per click
Adjustment Range Total Travel	100 MOA	70 MOA	40 MOA	70 MOA
Finish	Satin	Satin	Satin	Satin
Dimensions (L x W x H)	10.4 x 2.0 x 1.9 in.	12.55 x 2.26 x 2.26 in.	12.23 x 2.14 x 2.14 in.	12.55 x 2.26 x 2.26 in.
Weight	15.9 oz.	18.2 oz.	15.8 oz.	17.8 oz.
Tube Diameter	30mm	30mm	1 in.	30mm